

FS-Series LED-backlit Display 24" | 27"

Borderless Design for Viewing More



The 3-sided narrow bezel FS-Series is crafted with comfort and efficiency in mind for viewing more. The ergonomically-designed stand coming with a wide viewing angle brings convenience, comfort, and consistent colour performance for multiple users both at the workplace and in the home.





178°

178°


Wide Viewing Angle

More Screen Space, Wider Viewing Angle

Offering more screen space to accommodate greater images, the 3-sided narrow-bezel FS-Series caters to users either as stand-alone displays or multi-display setups. Given a wide (178°) viewing angle, it allows multiple users to comfortably share a single display at the same time.

Maximized Comfort and Efficiency

An ergonomically-designed stand makes it possible to configure your workstation and create a working environment the way you want it. For comfort, convenience, and efficiency, tilt, pivot, or swivel the display, adjust its height, or shift to either portrait or landscape mode.

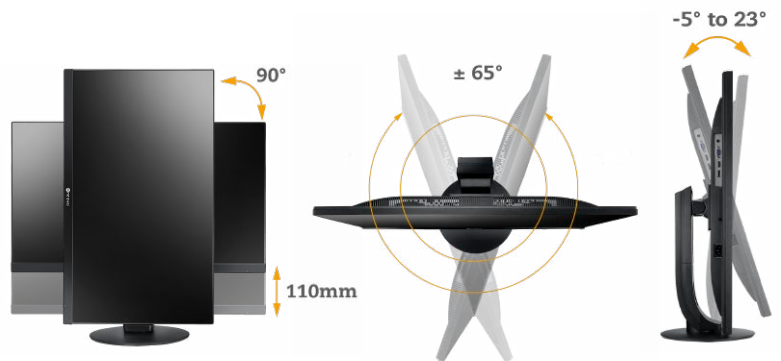

LOW BLUE LIGHT

Eye Comfort

Eye comfort figures high on the list of strengths that define the FS-Series. The flicker-free backlight and blue light filter of the FS-Series ensure a comfortable viewing experience by reducing eyestrain after long periods of use.

Features

- Full HD 1920 x 1080 resolution
- Crisp 20,000,000 dynamic contrast ratio
- 3-sided narrow bezel design for seamless multi-display setups
- Versatile connectivity: DisplayPort, HDMI, VGA
- Blue-light filter and Flicker-free display technology reduces eye discomfort
- VESA mount compatibility for flexible installation
- Height adjustable stand allows users to tilt, pivot and swivel

Specifications

FS-24

FS-27

Panel

Panel Type	LED-Backlit TFT LCD (IPS Technology)	LED-Backlit TFT LCD (VA Technology)
Panel Size	23.8"	27.0"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080
Pixel Pitch	0.275 mm	0.311 mm
Brightness	250 cd/m ²	300 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°
Display Colour	16.7M	16.7M
Response Time	5 ms	5 ms

Frequency

Frequency (H)	30 kHz-83 kHz	30 kHz-83 kHz
Frequency (V)	50 Hz-76 Hz	50 Hz-76 Hz

Signal Input

DisplayPort	x 1	x 1
HDMI	1.4 x 1	1.4 x 1
VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1

Audio

Audio In	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2	2W x 2

Power

Power Supply	Internal	Internal
Power Requirements	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz
On Mode	18W (On)	22W (On)
Stand-by Mode	< 0.5W	< 0.5W
Off Mode	< 0.5W	< 0.5W

Operating Conditions

Temperature	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)
Humidity	10%-85% (non-condensing)	10%-85% (non-condensing)

Storage Conditions

Temperature	-25°C-55°C (-13°F-131°F)	-25°C-55°C (-13°F-131°F)
Humidity	5%-93% (non-condensing)	5%-93% (non-condensing)

Mounting

VESA FPM/PMI	Yes (100 x 100 mm)	Yes (100 x 100 mm)
--------------	--------------------	--------------------

Stand

Tilt	-5° to 23°	-5° to 23°
Swivel	± 65°	± 65°
Height Adjustment	0-110 mm	0-110 mm

Security

Kensington Security Slot	Yes	Yes
--------------------------	-----	-----

Dimensions

Product with Base (W x H x D)	540.6 x 498.6 x 249.0 mm (21.3" x 19.6" x 9.8")	611.9 x 518.7 x 249.0 mm (24.1" x 20.4" x 9.8")
Product w/o Base (W x H x D)	540.6 x 322.6 x 49.0 mm (21.3" x 12.7" x 1.9")	611.9 x 366.57 x 49.0 mm (24.1" x 14.4" x 1.9")
Packaging (W x H x D)	632.0 x 417.0 x 282.0 mm (24.9" x 16.4" x 11.1")	715.0 x 450.0 x 305.0 mm (28.1" x 17.7" x 12.0")

Weight

Product w/o Base	3.3 kg (7.3 lb)	4.2 kg (9.3 lb)
Product with Base	5.7 kg (12.5 lb)	6.6 kg (14.5 lb)
Packaging	7.8 kg (17.1 lb)	8.9 kg (19.6 lb)

Regulation Approval

Certifications & Compliance	CE, CB, WEEE, RoHS, REACH, EAC	CE, CB, WEEE, RoHS, REACH, EAC
-----------------------------	--------------------------------	--------------------------------

Accessories

Supplied	Power Cord, HDMI Cable, Audio Cable, Quick Start Guide, Warranty Card	Power Cord, HDMI Cable, Audio Cable, Quick Start Guide, Warranty Card
----------	---	---

Optional Accessories

Ceiling Mount (Landscape only)	CMP-01+WMK-03	CMP-01+WMK-03
Wall Mount (Landscape only)	WMA-01, WMK-01, WMK-03, PMK-01	WMA-01, WMK-01, WMK-03, PMK-01
Desk Mount (Landscape only)	DMC-01, DMC-02D, DMS-01D, DMS-01Q, ES-02	DMC-01, ES-02

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d IJssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

displays.agneovo.com