


NEC LED-E018i

1.8 mm Indoor FinePitch LED Module

Datasheet

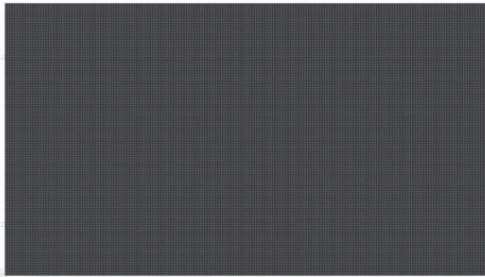

Large Image Presentation, Budget Preservation

Bringing all the advantages of fine-pitch LED to more cost-conscious applications in corporate meeting rooms and digital signage, the E series lacks nothing in high impact content delivery. The direct view LED solution includes everything you need to implement large surface visualisation without hindrance from bezels, with superb brightness and high contrast which gets noticed even in areas of high ambient light.

Designed for quick and easy set-up, the product is light weight and super slim for unobtrusive integration. Front serviceable, all components are easily accessed for maintenance.

As you would expect from a quality manufacturer, there is no compromise to reliability, longevity and safety in offering the E series solution. Consistent with all LED products from Sharp/NEC, the chassis is of metal construction.

Benefits

Trouble-free installation - for wall mounted or freestanding deployments, the mechanical cabinet design makes installation quick and easy.

Large scale for perfectly detailed imagery - completely bezel-less design with high contrast rates deliver an unhindered viewing experience.

Front serviceable modules - with front access to the LED modules, maintenance is easy.

Low-profile integration - the super slim and light weight modules align with perfection to create a large digital canvas which integrates unobtrusively into any environment.

Slim design - with a flush rear profile, LED modules can be integrated very close to the wall with minimal gap necessary due to very low heat emission.

Product Information

| | |
|---------------|------------------------------------|
| Product Name | NEC LED-E018i |
| Product Group | 1.8 mm Indoor FinePitch LED Module |
| Order Code | 81000222 |

Display

| | |
|--|-------------------------------|
| Pixel Configuration | 3-in-1 SMD (Black) |
| LED type | SMD (1415) |
| Aspect Ratio | 16:9 |
| Pixel Pitch [mm] | 1.8 |
| Brightness (max.) [cd/m ²] | 800 |
| Lifetime | 100000 hrs (50% brightness) |
| Contrast Ratio (typ.) | 5000:1 |
| Viewing Angle [°] | 140 horizontal / 140 vertical |
| Dimming Capability | 256 levels |
| Colour Processing | 16 bit |
| Colours [Trill.] | 281 |
| LED Driving Method | 1/60 dynamic scan |
| Frame Rate [Hz] | 50/60 |
| Refresh Rate [Hz] | ≤ 3840 |
| Colour Temperature [K] | 3000 - 9500 |

Screen Resolution

| | |
|----------------------------------|-----------|
| Resolution per m ² | 284444 |
| Number of Pixel per module [dot] | 320 x 180 |
| Number of Pixel per card [dot] | 80 x 180 |

Electrical

| | |
|----------------------------|-------------------------------------|
| Power Consumption typ. [W] | 212 per m ² (normal use) |
| Power Consumption max. [W] | 617 per m ² |

Environmental Conditions

| | |
|----------------------------|-----------|
| Operating Temperature [°C] | -20 to 40 |
| Operating Humidity [%] | 10 to 80 |

Mechanical

| | |
|--|------------------|
| Dimensions (W x H x D) [mm] per module | 600 x 337.5 x 29 |
| Weight [kg] | 4.7 |

Additional Features

| | |
|-------------------------|--|
| Shipping Content | LED Modules (1 Cabinets, 4 Pixel Cards); Spare Parts Kit |
| Special Characteristics | Flush Surface SMD Design; Single Data Receiving Cards; Single Power Supplies |
| Manufacturer | NEC |
| Serviceability | Front Service |
| IP Level | IP20 |
| Certifications | CE; ETL; FCC Class A; RoHS |

| | |
|----------|------------------|
| Warranty | 2 years |
| Material | Aluminum Cabinet |

This document is © 2023 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 14.02.2023