


Overview

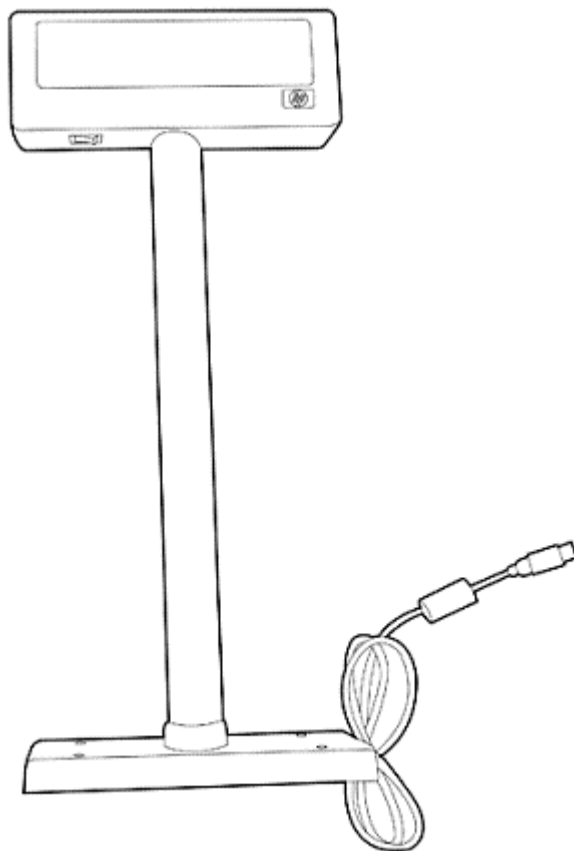

Models

HP POS Pole Display

FK225AA

Introduction

The HP POS Pole Display is a multi-size adjustable pole display that provides your customers clear, easy-to-read information at a high data-transfer rate. It can be tilted and swiveled for maximum visibility and can attach directly to HP rp3000, ap5000, and rp5700 POS Systems.

Overview

Key Features and Benefits

- Customers are easily able to read product information during checkout on the Vacuum Fluorescent Display
 - Flexible positioning allows for adjustment so that the display is clearly visible to the customer. Supports four different heights by adding extension supports (included in the kit)
 - Supports multiple command modes, with EPSON command mode set as default
 - USB interface, no external power required
 - To prevent damage from wet counter surfaces, the control boards are designed into the top display panel
 - For added stability in small spaces, the Pole Display has an optional circular mini-base
-

Compatibility

The HP POS Pole Display is compatible with HP rp3000, ap5000 and rp5700 Point of Sale Systems.

NOTE: Not all models are available in all regions.

Service and Support

Your HP Peripheral Limited Warranty is a three (3) year (HP Option Limited Warranty Period) parts replacement warranty.



Technical Specifications

General	Display Type	Vacuum Fluorescent Display, Blue Green	
	Brightness	350 – 700 cd/m ²	
	Character number	20 x 2	
	Character font	5 x 7 dot matrix, cursor	
	Character type	95 Alphanumeric, 32 International Characters	
	Supported Character Sets	Supported Code Pages: 437 English (US) 1252 International English 1252 French 1252 German 1252 Danish 1252 Swedish 1252 Italian 1252 Spanish Japan – Katakana 865 Norwegian 866 Slavonic/Russian 852 Bosnian 852 Croatian 1252 Czech 1252 Dutch 1257 Estonian 1252 Faroese 1252 Finnish 1252 Flemish 1253 Greek 1255 Hebrew 852 Hungarian 1252 Icelandic 1252 Indonesian 1257 Latvian 1257 Lithuanian 852 Polish 852 Slovene 852 Slovak	
	Character size	5.5(W) x 9.03(H) mm	
	Dot size (X * Y)	0.86 x 1.05 mm	
	Command Modes	ICD-2002, EPSON POS D101, Aedex, UTC/S, UTC/P, ADM788, DSP800, CD5220	
	Viewing Angle	90 degrees Max	
	Horizontal Rotation	355 degrees Max	
	Mechanical	Panel Dimensions	225 (W) x 50 (D) x 86 (H) mm
		Support (pole) Dimension	3 pole sections included: 130mm each Can also be used with no pole sections, mounting the panel directly onto the base
Rectangular Base Dimension		217mm (W) x 106mm (D) x 20 mm (H)	



Technical Specifications

	Optional Circular Base Dimension	F 70.96 x 65.48mm (W) x 35 mm (H)
	Cable Length	4.6 ft (1.4 m)
	Weight	520 g (VFD and cable) 45g (1 pole) 460g (rectangular base) 25g (circular base)
	Color	HP Carbonite
Interface/Connection	Interface	USB
	Connection	Type A
Power	Voltage (typical)	5V
	Current consumption (typical)	0.5 A
	Product Category	Class III
Operating Systems (Compatible with)	Genuine Windows 7 Professional 32 Genuine Windows 7 Professional 64 Genuine Windows Vista® Business 32 Genuine Windows Vista® Business 64 Genuine Windows XP Professional 32 Genuine Windows Embedded for Point of Service (WEPOS) Genuine Windows Embedded POSReady 2009	
Drivers	Windows native, OPOS, JPOS	
Reliability	MTBF=30,000 hours	
Agency Certifications	CE, FCC Class B, Canadian ICES-003 Class B, MIC, RoHS, WEEE, C-Tick, WHQL	
Option kit contents	HP POS Pole Display, Point of Sale System Software and Documentation CD and the Options Warranty Manual	

© Copyright 2011 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows, Windows XP and Windows Vista are trademarks of the Microsoft group of companies.

