
## Key Features

Reduce Clutter with Single-Cable Solution | Accurate from All Angles: SuperClear IPS Technology | Increased Comfort with Easy Swivel Stand | Smooth & Fluid Gaming: AMD FreeSync ™ Technology | Vivid Visuals within a Frameless Design



## Product **Description**

Designed for the modern-day home office, the ViewSonic<sup>®</sup> VX2485-mhu is a 24″ Full HD IPS monitor that combines style with optimal versatility and functionality. Whether for gaming, streaming, or editing, these sleek and slim displays are engineered with the everyday user in mind. Equipped with AMD FreeSync<sup>™</sup> technology<sup>\*</sup>, this monitor's variable refresh rate capabilities virtually eliminate screen tearing and stuttering for a smoother viewing experience. With a three-sided borderless design, thin profile, and thoughtful cable management features, this display transforms the desktop into a streamlined and clutter-free workspace. What's more, a unique ergonomic stand allows you to easily tilt and swivel the screen for maximum comfort. The latest USB 3.2 Type-C connectivity delivers charging power, video, and audio over a single cable, while HDMI and VGA inputs keep you connected to your favorite devices.

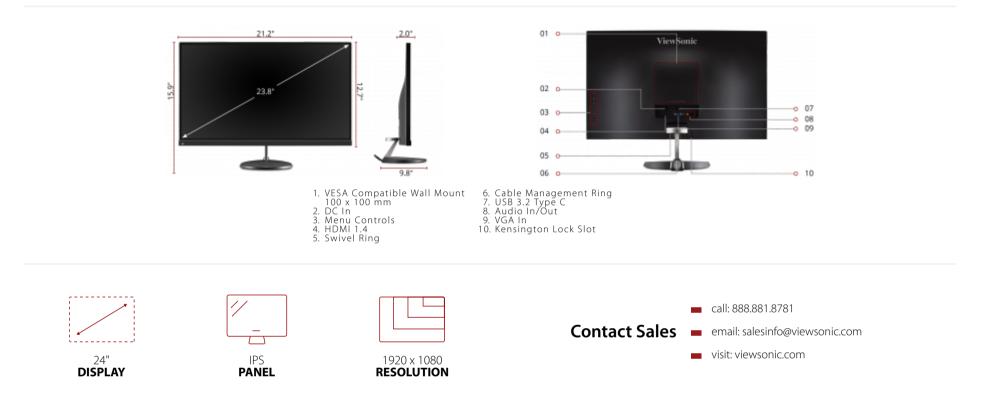

Diplay SimulyVideo SignateDiplay Simuly4Revency HorticanuelMoVI Adde Add KUS Signape C. See Add KUSPanel Signate15Revency HorticanuelHDM (H.A.) 4.4 ar Add KUS Signape C. See Add KUSPanel SignateSignate C. See Add KUSHorticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate16Norticanuel C. See Add KUSHorticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate10000Horticanuel C. See Add KUSHorticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate1000010000Horticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate1000010000Horticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate100000100000Horticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate10000001000000Horticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate10000000000010000000000000000Horticanuel C. See Add KUSHorticanuel C. See Add KUSPanel Signate1000000000000000000000000000000000000
Neaded withinSaRequery termMeduationMeduationPartipiesPSVorterVorterRealutionSa NationMartipiesSa NationSa NationRealution TypeVorterMeduationSa NationSa NationSa NationNationSa NationSa NationSa NationSa NationNationMeduationSa NationSa NationSa NationSa NationNationSa NationSa Nation<
PerformPictureControlRedura:1920 R080Diglal Sm:Mole route Autore State
Resolutionjoint 2000Display from the properties of the properise of
Reduited TypeH0190km80FormationStart Cortrast Ratio:1,001SwinetSwinetSpace Cortrast Ratio:Dynanic Cortrast Ratio:1,000Tit Gromar/Bacis:S - 20Dynanic Cortrast Ratio:1,000Tit Gromar/Bacis:S - 20Birghtness:25 od m/2Na (birgheralit:S - 20Birghtness:1,000Na (birgheralit:S - 20Color Space Support:1,000Na (birgheralit:S - 20Apert Ratio:1,000Na (birgheralit:S - 20Apert Ratio:1,000Na (birgheralit:S - 20ResponstTime (Typical TS):1,000Na (birgheralit:S - 20Newing Angle:1,200Na (birgheralit:Na (birgheralit:Newing Angle:1,200
State Contras Ratio:Non- <th< td=""></th<>
Dynamic Contrast Relicion8000000000000000000000000000000000000
Lighsoure:EDWeight(meright):Use (March (Mar
Bightness:Solond2Net/BigSelectionColors:6/MNet/BigSelectionColors:16/MSelectionSelectionColors:16/BigSelectionSelectionAscet RationManMet/SelectionSelectionResponseTime(Myolor):ManNet/BigSelectionMandangeneManNet/BigSelectionAscet RationManNet/BigSelectionMandangeneManNet/BigSelectionAnalysisManNet/BigSelectionMandangeneManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/BigSelectionAnalysisManNet/Big
Corrs:62MMetMand MetMand Met
Appendix esponse Time (Typical CTM)isolandWeight (metric): structure (Structure)Action (Structure) <t< td=""></t<>
Apectation69Height Height HeightAspons Time (York)100Net(Norm)2.0Aspons Time (York)Norman (York)Norman (York)2.0Asoland (York)Norman (York)Norman (York)Norman (York)Asoland (York)Norma
Response Time (Trypted CFG)Image (Sing)Image (Sing) <th< td=""></th<>
ReponsitionindNetworkindNewsindindind <tdind< td="">NewsindindindindNewsindindindindNewsindindindindNewsindindindindNewsindindindindNewsindindindindNewsindindindindNe</tdind<>
Backlight Life (Hours):3,000Dimensions (imperial) (WxHxD):Panel Surface:Anti-Giare type, Hard-coating (3H), Haze 25%Packaging (n.):2,6x 16.1 x 4.9Refresh Rate (Hz):7Physical (in.):1.2 x 15.9 x 9.8Compatibility:920 x 1080Physical (WxHxD):1.2 x 12.7 x 2.0PC Resolution (max):920 x 1080Packaging (mn):640.0 x 410.0 x 125.0Connector:1920 x 1080Packaging (mn):640.0 x 40.0 x 25.0.USB 3.2 Gen 1 Type C(1), 3.5 mn Audio Out(1), VGA(1), HDM 1.4 In(1)Physical (Wthu Stand (mn):640.0 x 32.0 x 50.0USB 3.2 Gen 1 Type C(1), 3.5 mn Audio Out(1), VGA(1), HDM 1.4 In(1)Physical Without Stand (mn):640.0 x 32.0 x 50.0USB 3.2 Gen 1 Type C(1), 3.5 mn Audio Out(1), VGA(1), HDM 1.4 In(1)Physical Without Stand (mn):640.0 x 32.0 x 50.0USB 3.2 Gen 1 Type C(1), 3.5 mn Audio Out(1), VGA(1), HDM 1.4 In(1)Physical Without Stand (mn):640.0 x 32.0 x 50.0USB 3.2 Gen 1 Type C(1), 3.5 mn Audio Out(1), VGA(1), HDM 1.4 In(1)Physical Without Stand (mn):640.0 x 32.0 x 50.0USB 3.2 Gen 1 Type C(1), 3.5 mn Audio Out(1), VGA(1), HDM 1.4 In(1)Physical Without Stand (mn):640.0 x 32.0 x 50.0MaticiImmerial Speakers:Physical Without Stand (mn):640.0 x 32.0 x 50.0Power:Immerial Speakers:Physical Without Stand (ms):Foregrafical Without Stand (ms):Internal Speakers:Immerial Speakers:Physical Without Stand (ms):Foregrafical Without Stand (ms):Internal Speakers:Immerial Speakers:Immerial Without Stand (ms):Foregrafical Withou
Panel Surface:Anti-Glare type, Hard-coating (3H), Haze 25%Packaging (in):4.6 × 1.6 × 1.4 · 1.9Refers Rate (H2):5Pysical (In):1.2 × 1.5 × 9.8Compatibility:1.9 × 1.08Pysical (In):1.2 × 1.2 × 2.0PC Resolution (max):9.0 × 1.08Dimension (metric) (WXH)Mc* Resolution (max):9.0 × 1.08Packaging (In):6.04 × 1.04 × 1.05 ×
Refersjoldpysical (in):2x 2x 3x 9x 9x 9x 0x
Compatibility:Physical Without Stand (in.):21.2 x 12.7 x 2.0PC Resolution (max):1920 x 1080Dimensions (metric) (WxHxD):Mac* Resolution (max):1920 x 1080Packaging (mm):624.0 x 410.0 x 125.0Connector:Physical (mm):640.0 x 404.0 x 250.0USB 3.2 Gen 1 Type C(1), 3.5 mm Audio Out(1), VGA(1), HDM1.4 In(1)Physical Without Stand (mm):640.0 x 322.0 x 50.0Audio:Connector:Connector:Connector:Internal Speakers:W (x2)Regulations: cTUVus, FCC-B, ICES03 - Energy Star, EPEAT, CEC, NRCan, MX-CoC, Mexico EnergyPower:PACKAGE CONTENTS: VX2485-mL-V/DC Power Adapter, HDMI Cable, Quick Start GuideEco Mode (Conserve):1930Recycle/Disposi: Please dispose - Laccordance with local, state or federal laws.Eco Mode (Conserve):1940Quert: Three-year limited warrs: th
PC Resolution (max):920 x 1080Dimensions (metric) (WxHxD):Mac* Resolution (max):920 x 1080Packaging (mm):640.0 x 10.0 x 12.0.0Connector:Physical (mm):90.0 x 404.0 x 25.0.0USB 3.2 Gen 1 Type C(1), 3.5 mm Audio Out(1), VGA(1), HDM114 In(1)Physical Without Stand (mm):30.0 x 32.0 x 50.0Audio:General:640.0 x 32.0 x 50.0Formaria:Nu SRegulations: cTUVus, FCC-B, ICESU:Formaria:Intend Speakers:Nu SRegulations: cTUVus, FCC-B, ICESU:Formaria:Power:Recycle/Disposal: Please dispose:Formaria:Formaria:Intend Speakers:13MRecycle/Disposal: Please dispose:Formaria:Intend Speakers:16MWarraty: Three-year limited warraty - type and backlightState or fideraria laws.Intend Speakers:18MGenoretic:Gradomatic Hinee-year limited warraty - type and backlightIntend Speakers:18MGenoretic:State or fideraria laws.Intend Speakers:18MGenoretic:<
Mac* Resolution (max):J920 x 1080Packaging (mm):624.0 x 410.0 x 125.0Connector:Physical (mm):540.0 x 404.0 x 250.0USB 3.2 Gen 1 Type C(1), 3.5mm Audio Out(1), VGA(1), HDM1 1.4 In(1)Physical Without Stand (mm):540.0 x 322.0 x 50.0Autio:General:Internal Speakers:3W (x2)Regulations: cTUVus, FCC-B, ICES/USL, FDEAT, CEC, NRCan, MX-CoC, Mexico EnergyPower:9X (x2)Regulations: cTUVus, FCC-B, ICES/USL, FDCP, NRCan, MX-CoC, Mexico EnergyFor Mode (Conserve):13WRecycle/Disposal: Please dispose of inaccordance with local, state or federal laws.For Mode (optimized):16WWarranty: Three-year limited warrus true or parts, labor and backlightConsumption (typical):94WCeresories:Voltage:00-240 VAC, 50-60HzCe-0010555, CB-0010684, CB-0012984, LCD-DMA-001, LCD-DMA-002, LCD-DMA-0
Connector: Physical (mm): \$40.0 x 404.0 x 250.0   USB 3.2 Gen 1 Type C(1), 3.5 mm Audio Out(1), VGA(1), HDM1 1.4 ln(1) Physical Without Stand (mm): \$40.0 x 322.0 x 50.0   Audio: General:   Internal Speakers: W (2) Regulations: cTUVus, FCC-B, ICES00J Energy Star, EPEAT, CEC, NRCan, MX-CoC, Mexico Energy   Power: PACKAGE CONTENTS: VX2485-mhu, AC/DC Power Adapter, HDMI Cable, Quick Start Guide   Eco Mode (Conserve): 13W Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.   Eco Mode (optimized): 16W Warranty: Three-year limited warrus on parts, labor and backlight   Consumption (typical): 4W UPC: 766907003949   Consumption (typical): 94W Censorties:   Voltage: 100-240Cx50-60Hz CB-00010585, CB-00012084, LGD-DDM-001, LCD-DMA-002, LCD-DMM-002, LCD-DMM-001, LCD-DMM-002, LCD-DMM-001, LCD-DMM-002, LCD-DMM-001, LCD-DMM-001, LCD-DMM-002, LCD-DMM-001, L
USB 3.2 Gen 1 Type C(1), 3.5mm Audio Out(1), VGA(1), HDMI 1.4 In(1)   Physical Without Stand (mm):   540.0 x 322.0 x 50.0     Audio:   General:     Internal Speakers:   3W (x2)   Regulations: cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCan, MX-CoC, Mexico Energy Star     Power:   PACKAGE CONTENTS: VX2485-mhu, AC/DC Power Adapter, HDMI Cable, Quick Start Guide     Eco Mode (Conserve):   13W   Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.     Eco Mode (optimized):   16W   Warranty: Three-year limited warranty on parts, labor and backlight     Consumption (typical):   8W   UPC: 766907003949     Yottage:   00-240 VAC, 50-60Hz   CB-000105684, CB-0010684, CB-0012984, LCD-DMA-001, LCD-DMA-002, LCD-MMK-001
Audio:General:Internal Speakers:M(2)Regulations: cTUVus, FCC-9, ICES003, Energy Star, EPEAT, CRC, MAC-CO, Mexico EnergyPower:PACKAGE CONTENTS: VX2485-mhu, AC/DC Power Adapter, HDMI cable, Quick Start GuideIco Mode (conserve):M3Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.Ico Mode (conserve):M4Warranty: Three-year limited warranty on parts, labor and backlightIco Mode (conserve):N8UPC: 76690703949Ico sumption (typical):M4AccessoriesIco sumption (typical):N0-200402Beolotion State Oscila S
Internal Speakers:3W (x2)Regulations: cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCan, MX-CoC, Mexico EnergyPower:PACKAGE CONTENTS: VX2485-mhu, AC/DC Power Adapter, HDMI Cable, Quick Start GuideEco Mode (Conserve):13WRecycle/Disposal: Please dispose of in accordance with local, state or federal laws.Eco Mode (optimized):16WWarranty: Three-year limited warranty on parts, labor and backlightConsumption (max):94WAccessoriesVoltage:10-240 ACEco Mode, Consumption, School (2000)Mode, Consumption (max):10-240 ACEco Mode, Consumption, School (2000)Mode, Consumption (max):94WAccessoriesMode, Consumption (max):10-240 ACEco Mode, Consumption, School (2000)Mode,
Power:PACKAGE CONTENTS: VX2485-mhu, AC/DC Power Adapter, HDMI Cable, Quick Start GuideEco Mode (Conserve):13WRecycle/Disposal: Please dispose of in accordance with local, state or federal laws.Eco Mode (optimized):16WWarranty: Three-year limited warranty on parts, labor and backlightConsumption (typical):18WUPC: 766907003949Consumption (max):94WAccessories:Voltage:10-240 VAC, 50-60HzCB-00010555, CB-00010684, CB-00012984, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001
Eco Mode (Conserve):13WRecycle/Disposal: Please dispose of in accordance with local, state or federal laws.Eco Mode (optimized):16WWarranty: Three-year limited warranty on parts, labor and backlightConsumption (typical):18WUPC: 766907003949Consumption (max):94WAccessories:Voltage:100-240 VAC, 50-60HzCB-00010555, CB-00010684, CB-00012984, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001
Eco Mode (optimized):16WWarranty: Three-year limited warranty on parts, labor and backlightConsumption (typical):18WUPC: 766907003949Consumption (max):94WAccessories:Voltage:10-240 VAC, 50-60HzCB-00010555, CB-00010684, CB-00012984, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001
Consumption (typical):     18W     UPC: 766907003949       Consumption (max):     94W     Accessories:       Voltage:     100-240 VAC, 50-60Hz     CB-00010555, CB-00010684, CB-00010958, CB-00012984, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001
Consumption (max):     94W     Accessories:       Voltage:     100-240 VAC, 50-60Hz     CB-00010555, CB-00010684, CB-00010958, CB-00012984, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001
Voltage: 100-240 VAC, 50-60Hz CB-00010555, CB-00010684, CB-00010958, CB-00012984, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001
Stand-by: 0.5W
Power Supply: External
Additional Hardware:
Kensington Lock Slot: 1
Controls:
Physical Controls: Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display: Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Operating Conditions:
Temperature: 32-104° F (0 - 40° C)
Humidity (non-condensing): 20-90%
Mount:
VESA Compatible: 100 x 100 mm

Copyright © ViewSonic Corporation 2000-2020. All rights reserved. (02/17/2020 12:15 AM PST)