

ViewSonic® LED DISPLAY VG2419


Key Features

- Ergonomic tilt, swivel, pivot and height adjustments
- HDMI, DisplayPort and VGA connectivity
- Dual 1.5W speakers
- Full HD display with SuperClear® IPS panel technology
- Flicker-Free technology and Blue Light Filter



Product Description

The ViewSonic® VG2419 is a 24" FHD monitor with an ergonomic stand, which allows you to easily tilt and swivel your monitor to an ideal position; furthermore, you can adjust the height and rotate the monitor 90 degrees for portrait viewing. To make the most of the ergonomic design, the VG2419 is also built with Flicker-Free technology and a Blue Light Filter to reduce your eye fatigue after a long day of use. The VG2419 adopts SuperClear® IPS panel technology to ensure consistent brightness with a 178° wide viewing angle and 16.7M display colors. The viewing experience is complemented by its narrow bezel design, which increases the viewable area of the VG2419 screen. To support your work, the VG2419 is equipped with VGA, HDMI, DisplayPort connectivity. During work, you can switch to Eco Mode for lower energy consumption. The VG2419 is also certified by TCO for better product sustainability and efficient end-to-end enterprise experience.

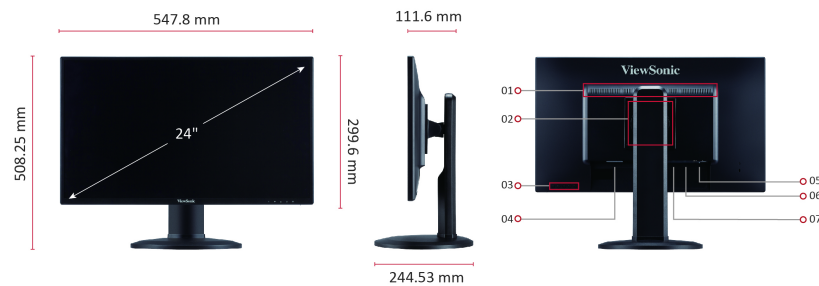

1. Internal Speakers
2. VESA Compatible (Wall Mount 100 x 100mm)
3. Menu Controls
4. AC in
5. VGA
6. HDMI

7. DisplayPort

Visit Us  www.viewsonic.com

DISPLAY

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m2 (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + Hi-FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Adaptive Sync:	Yes
Blue Light Filter:	Yes
Flicker-Free:	Yes

Color Gamut:	NTSC: 72% size (Typ), sRGB: 104% size (Typ)
Pixel Size:	0.275 mm (H) x 0.275 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 8/10 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
HDMI 1.4:	1
Display Port:	1
Power in:	3-pin Mickey Mouse Socket (IEC C6)

AUDIO

Internal Speakers:	1Watts x2
--------------------	-----------

POWER

Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.3W
Power Supply:	Internal

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (eye), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	24 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Height Adjust (mm):	110
Swivel:	320°
Tilt (Forward/Back):	-5° / 22°
Pivot (Right/Left):	90° / 0°

WEIGHT (IMPERIAL)

Net (lbs):	11.5
Gross (lbs):	15

WEIGHT (METRIC)

Net (kg):	5.2
Gross (kg):	6.8

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	27.4 x 15.2 x 7
Physical (in.):	21.6 x 15.68~20.01 x 9.6
Physical Without Stand (in.):	21.6 x 12.7 x TBD

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	697 x 385 x 178
Physical (mm):	548 x 398.25~508.25 x 245
Physical Without Stand (mm):	548 x 322 x TBD

GENERAL

Regulations:	Energy Star 8.0, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 8.0, EAC, UkrSEPRO
PACKAGE CONTENTS:	VG2419 x3-pin Mickey Mouse Plug (IEC C5), 3-pin Mickey Mouse Plug (IEC C5) x1, HDMI Cable (v1.4; Male-Male) x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards