

ViewSonic® LCD DISPLAY VA2715-2K-MHD


Key Features

- QHD 2560 X 1440 resolution
- 75Hz FreeSync to eliminate screen tearing and reduce stuttering
- Dual 2 watts speakers
- 3-side borderless bezel
- HDMI and DisplayPort inputs for connectivity



Product Description

The ViewSonic VA2715-2K-MHD is a 27" 2K monitor with HDMI and DisplayPort input for business or home usage. With a 27" display and 2560 X 1440 resolution that delivers larger and clearer images, the QHD monitor expands your productivity. Delivering a stunning image quality with low power consumption, this monitor provides six ViewMode presets that deliver optimised screen performance based on your needs. FreeSync means no tearing or stuttering even when gaming. The eye care technology that comes standard with all VA monitors helps to eliminate eyestrain from extended viewing periods. A VESA-compatible mount makes this monitor is easy to setup on the wall or with a wide range of industry-standard mounts.

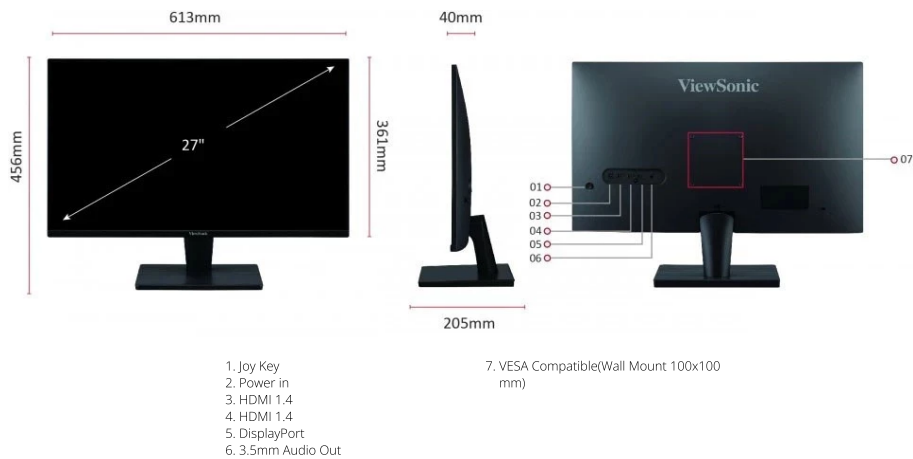

Visit Us  www.viewsonic.com

DISPLAY

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	VA Technology
Resolution:	2560 x 1440
Resolution Type:	QHD (Quad HD)
Static Contrast Ratio:	4,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	75
Adaptive Sync:	FreeSync
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	2560x1440

CONNECTOR

3.5mm Audio Out:	1
HDMI 1.4:	2
DisplayPort:	1
Power in:	DC Socket (Center Positive)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	16W
Eco Mode (optimized):	19W
Consumption (typical):	22W
Consumption (max):	31W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	U, R, D, L, EN (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	15 ~ 120KHz
Frequency Vertical:	24 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
---------------	--

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	7.9
Net Without Stand (lbs):	6.8
Gross (lbs):	11

WEIGHT (METRIC)

Net (kg):	3.6
Net Without Stand (kg):	3.1
Gross (kg):	5

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	27.1 x 17.6 x 5
Physical (in.):	24.1 x 18 x 8.1
Physical Without Stand (in.):	24.1 x 14.2 x 1.6

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	688 x 448 x 128
Physical (mm):	613 x 456 x 205
Physical Without Stand (mm):	613 x 361 x 40

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, RCM, VCCI, PSE
PACKAGE CONTENTS:	VA2715-2K-MHD x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Country Of Origin:	54
Power Management:	Energy Star standards, EPEAT