



# 15" RackMount Console



KVM-0115

H/W Version: 1

### An Ideal Solution for Complete KVM Management

LevelOne announces the release of KVM-0115 and KVM-0117 KVM RackMount Console that incorporates a display with keyboard and trackball to manage the remote servers.

### Multiple Input Interfaces

The LevelOne KVM-0115 and KVM-0117 provides the most economical and convenient server management-solutions available in today's competitive network management markets. Equipped with an integrated PS/2 and USB interface to control workstations through its integrated keyboard, touchpad and TFT display the KVM management switches provide full management access to server farms and other systems connected.

### Bright Active Matrix TFT Display


The KVM-0115 and KVM-0117 KVM RackMount Console are available with either a 15 inch or 17 inch bright active matrix TFT display. With high resolutions display of up to 1024x768 on the 15 inch KVM-0115 and 1280x1024 on the 17 inch KVM-0117 LCD Drawers, system and server status can easily be monitored and managed from the TFT display.

### Quick and Easy Installation

The LevelOne KVM-0115 and KVM-0117 also feature a unique 1U rack-mountable dual-rail design for easy installation and quick access in server control rooms or in a remotely controlled location.



1. DVI PC Port
2. VGA PC Port
3. USB PC Port
4. PS/2 PC Port
5. Power

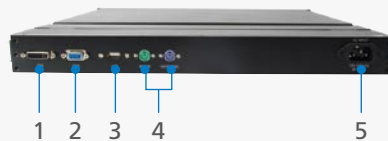

### Key Features

- Bright Active Matrix TFT Display
- OSD function for LCD display
- Panel Protected by Tempered Glass
- 15 pins high density connector
- 15 Language keyboard format and easy glide touchpad
- Durable Keyboards (touchpad or trackball)
- Support PS/2 and USB Console Interface
- Support DVI Interface

### Works Well With



**KVM-1611**  
16-Port PS/2 KVM Switch



**KVM-0831**  
8-Port combo KVM Switch w/  
Expansion Slot

## Technical Specification

### Display Size

15"

### Number of Port

1

### Panel Type

Active Matrix TFT LCD

### PC Interface

PS/2 x 2, USB x1, DVI x1

### Resolution

1024 x 1786 (SXGA)

### Pixel Pitch

0.297mm x0.297mm

### Viewing Angle (CR > 10)

Right-Left view 130° (Typ) Up-Down View 100° (Typ)

### Contrast Ratio

400:1

### Brightness

White 250cd/m2 (Center 1 point Typ)

### Back Light

Dual Lamps for Back Light

### Colors Supported

16M Colors (6-bit with FRC)

### Response Time

Rising Time 5ms, Decay Time 11ms

### Operating System

Dos, Windows (3.1,9x, 2000, NT4, ME, XP, 2003 Server)

Linux, Novell 3.12-6, HP UX,SUN

### Multi Platform

PS/2, SUN and USB

### System cables

VGA, PS/2, DVI, USB

### Keyboard Mouse

106 key PS/2 keyboard with touch pad

### Sync

45-80KHZ

### Power Source

100-240 VAC input

### Dimension (mm)

447.5 x 482 x44mm

### Weight

11.8Kg/ 26.0Lb

### Power Consumption

16W, 10.41W for Panel

### Operation Temp.

0~50 C


### Storage Temp.

-20 ~ 60C

### Humidity

10%~90%RH

## Product Diagram

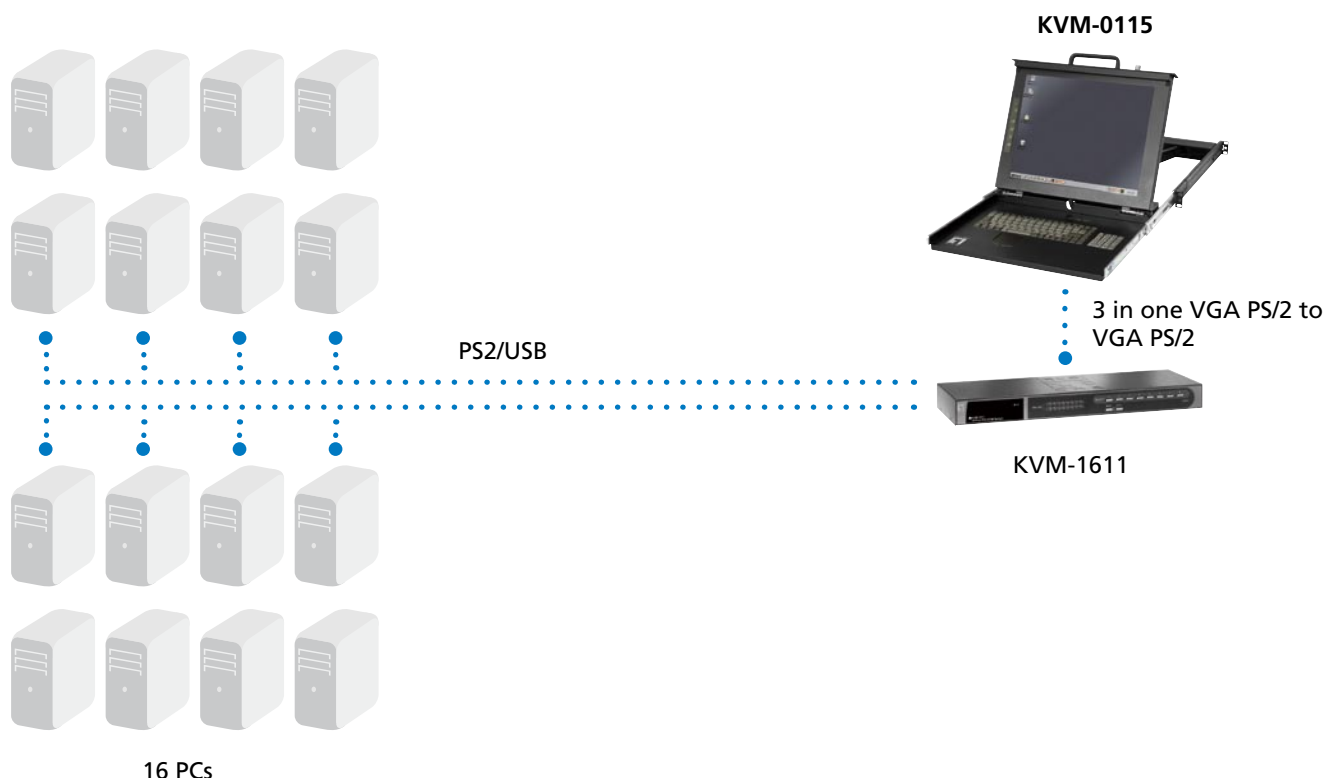

## Order Information

**KVM-0115:** 15" RackMount Console

## Package Contents

KVM-0115 x1, Rail with front and rear bracket x 1, Long brackets. (Needed for rack depth 828~1000mm) x 2, 1.8M cable (PS/2 mouse, PS/2 keyboard, DB15 VGA) x 1, USB x 1  
DVI cable x1, Power cord x 1, CD with user manual x 1, QIG x 1, Keys x 2, Screws