


REV.	Change NO.	Change Description	Date	Approved
A0		NEW	2020.05.21	

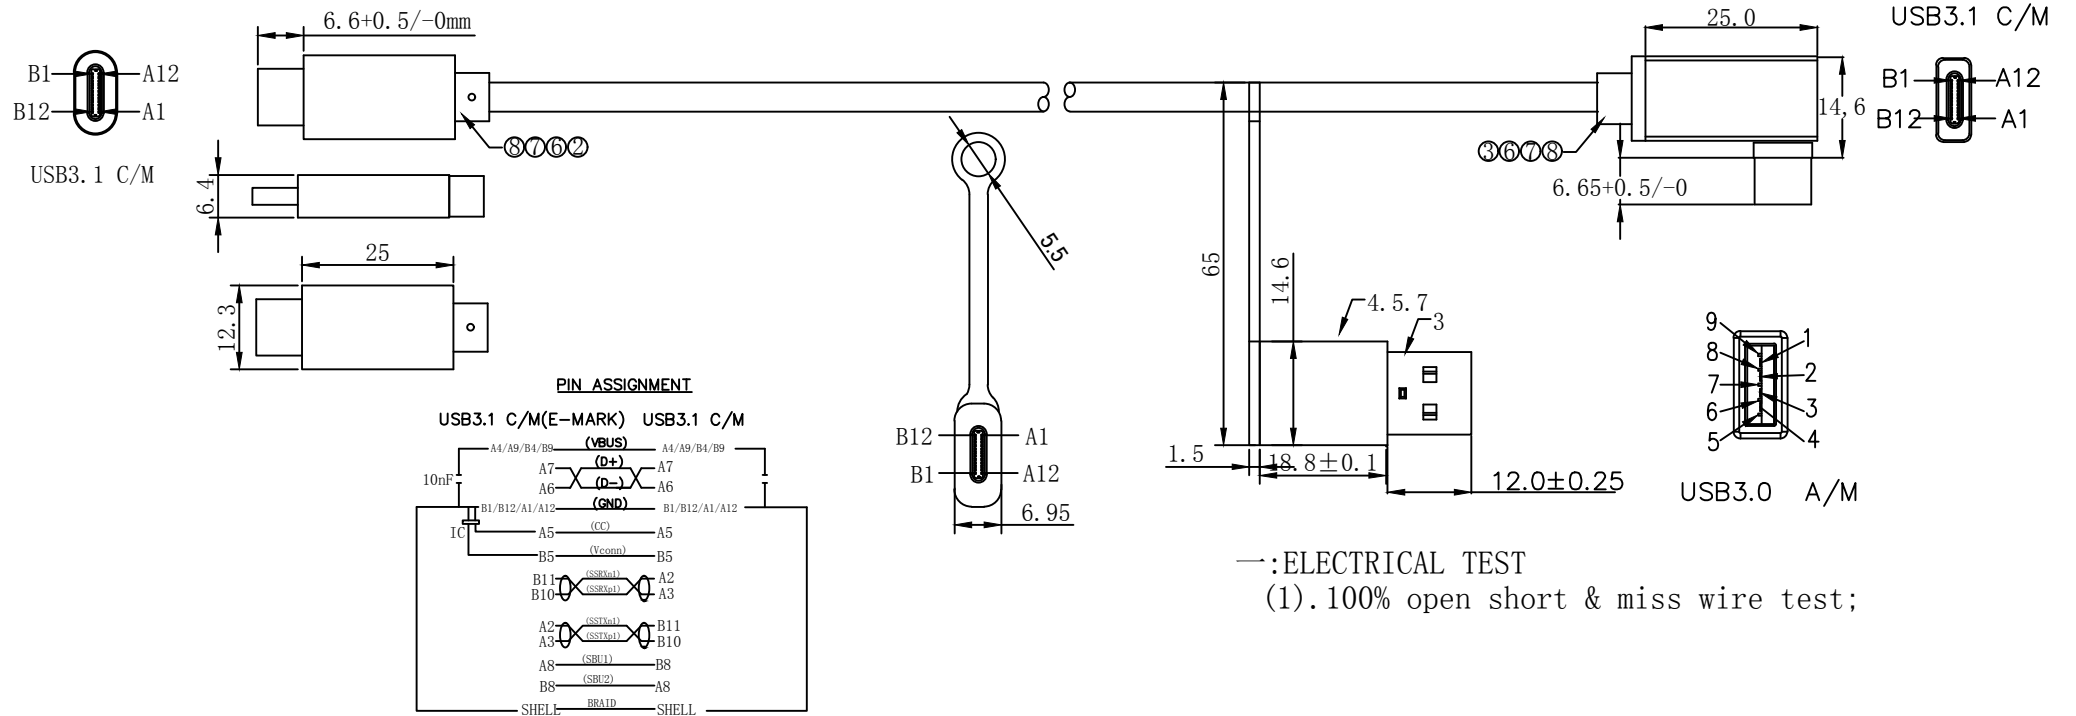

—:ELECTRICAL TEST
 (1).100% open short & miss wire test;

8	PVC	45P Black PVC		
7	PE	LD-PE	7	g
6	SHELL	Aluminum alloy casing, L25xW12.3xH6.4mm	4	g
5	SHELL	Aluminum alloy casing, L18.8xW14.6xH6.95mm BLACK	2	PCS
4	ADAPTER	USB 3.0 A/M to TYPE C/F	1	PCS
3	USB3.1 C/M	Pin Plated,Shell Nickel Plated,Black Insulator,with E-mark	2	PCS
2	USB3.1 C/M	Pin Plated,Shell Nickel Plated,Black Insulator no E-mark	2	PCS
1	Cable	(2C*32#+AM)*4P+1P*32#+4C*32#+2C*22#+AL+B(96/0.08TC) OD:5.0mm		mm
NO.	Name	Specifications	QTY	UNIT

ITEM NO.	USB3.1CC1MDE	Customer	EET Group A/S		
DESCRIPTION	USB3.1 C/M to USB3.1 C/M+ADAPTER	REV.	A0	FILE	
Spec.	100W & 5Gbps	PAGE	1 OF 1	APPRO	Emil Olsen
		UNIT	mm	CHECK	
		SCALE	NONE	DRAWN(绘图)	
		PROJECTION	☉	DATE:	2020.05.21

