

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC300V 10M ohm;
- (3). Conductor resistance: * ohm/M;
- (4). Dielectric strength: 200V AC/Sec, 1mA.


2. RoHS COMPLIANT

3. Fluke Cat6A Channel Link Pass

	Grey	Blue	Green	Red	Black	White	Yellow
0.,25m	MC-UTP6A0025	MC-UTP6A0025B	MC-UTP6A0025G	MC-UTP6A0025R	MC-UTP6A0025S	MC-UTP6A0025W	MC-UTP6A0025Y
0.5m	MC-UTP6A005	MC-UTP6A005B	MC-UTP6A005G	MC-UTP6A005R	MC-UTP6A005S	MC-UTP6A005W	MC-UTP6A005Y
1.0m	MC-UTP6A01	MC-UTP6A01B	MC-UTP6A01G	MC-UTP6A01R	MC-UTP6A01S	MC-UTP6A01W	MC-UTP6A01Y
1.5m	MC-UTP6A015	MC-UTP6A015B	MC-UTP6A015G	MC-UTP6A015R	MC-UTP6A015S	MC-UTP6A015W	MC-UTP6A015Y
2.0m	MC-UTP6A02	MC-UTP6A02B	MC-UTP6A02G	MC-UTP6A02R	MC-UTP6A02S	MC-UTP6A02W	MC-UTP6A02Y
3.0m	MC-UTP6A03	MC-UTP6A03B	MC-UTP6A03G	MC-UTP6A03R	MC-UTP6A03S	MC-UTP6A03W	MC-UTP6A03Y
5.0m	MC-UTP6A05	MC-UTP6A05B	MC-UTP6A05G	MC-UTP6A05R	MC-UTP6A05S	MC-UTP6A05W	MC-UTP6A05Y
7.5m	MC-UTP6A075	MC-UTP6A075B	MC-UTP6A075G	MC-UTP6A075R	MC-UTP6A075S	MC-UTP6A075W	MC-UTP6A075Y
10m	MC-UTP6A10	MC-UTP6A10B	MC-UTP6A10G	MC-UTP6A10R	MC-UTP6A10S	MC-UTP6A10W	MC-UTP6A10Y
15m	MC-UTP6A15	MC-UTP6A15B	MC-UTP6A15G	MC-UTP6A15R	MC-UTP6A15S	MC-UTP6A15W	MC-UTP6A15Y
20m	MC-UTP6A20	MC-UTP6A20B	MC-UTP6A20G	MC-UTP6A20R	MC-UTP6A20S	MC-UTP6A20W	MC-UTP6A20Y
30m	MC-UTP6A30						

CN1 (568B)

CN2 (568B)

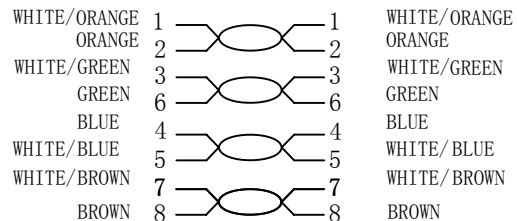

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
③	CABLE	UTP 7/0.16BC*2P*4+Cross, LOSH, OD=5.0±0.2MM	1	
②	OVER MOLD	PVC 75	2	
①	CONNECTOR	Cat6 8P8C, Pin FU Gold plated	2	

		DRAW NO.	PRODUCT NAME	Cat6A UTP Patch cable, LOSH	
		CUSTOMER	VIEW	Tolerance X. ±1.00 X.X ±0.50	
ITEM NO.		APPOBY	CHECKBY	DRAWNBY	UNTT
					MM
				Page	1 of 1