



RoHS Compliant

REV	DESCRIPTION OF CHANGE	DATE
A0	INITIAL RELEASE	2023-03-07

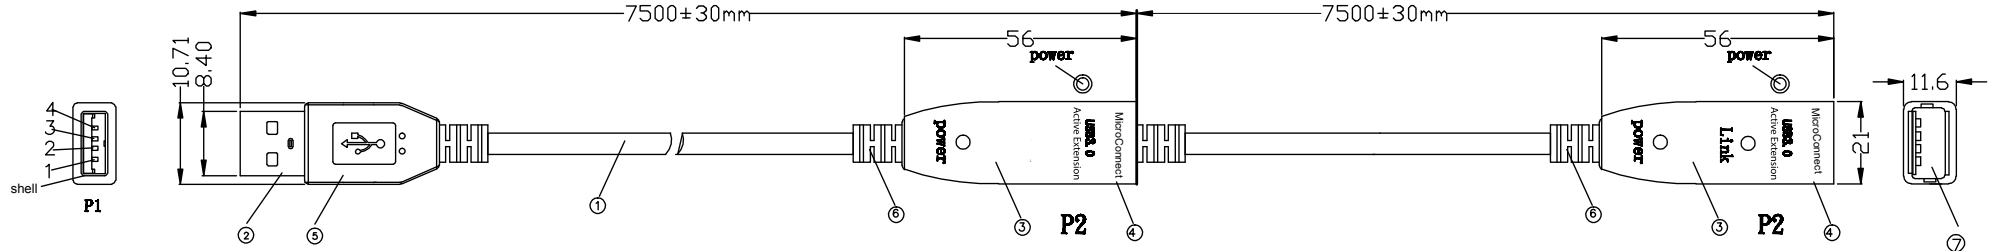

PIN OUT

P1		P2
1	RED	1
2	WITH	2
3	green	3
4	BLACK	4
SHIELD		SHIELD

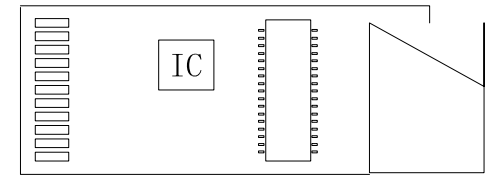

NO.	Material name	Specifications Description	Quantity
7	Connector	USB3.0 A FEMALE, Nickel plated, Blue Insulator	1 Pcs
6	Strain Relief	Black PVC	1 Pcs
5	Moulding	Black PVC	1 Pcs
4	Housing	Black ABS	1 Pcs
3	Chipset	USB PCBA, Inside Chipset: VL210	1 Pcs
2	Connector	USB3.0 A MALE, Nickel plated, Blue Insulator	2 Pcs
1	Cable	[(17/0.16TC*1P+D+AL)*2+7/0.16TC*1P+7/0.16TC*2C+AEBJ]*1C OD:7.0mm JACKET PVC BLACK	1 Pcs

(DWG NO)		(UNIT) MM		
(REV)		(SCALE)		
(PAGE)	1/1			
(DESIGN)		<small> DIMENSIONS ARE IN MILLIMETERS TOLERANCES: LINEAR: X ± 1.0 XX ± 0.5 XXX ± 0.15 XXXX ± 0.05 ANGULAR: ± 0.5° </small>	(ITEM NO)	USB 3.0 ACTIVE,15M
(CHECKED)			(PART NO)	USB3.0AAF15A
(APPROVED)	Emil Olsen			