



REV	MODIFICATION	DATE
A		2021.02.20

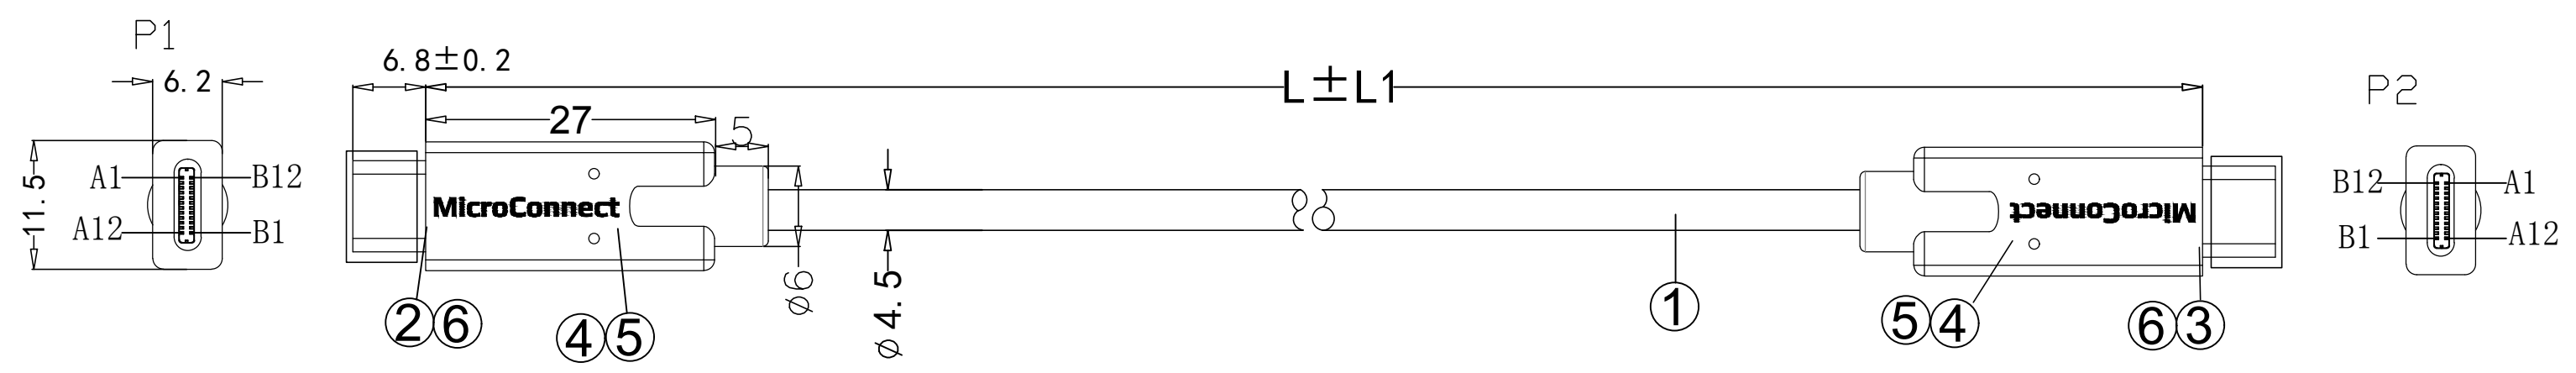

P/N CHART

	PART NO:	L	L1
	USB3.2CC0.5	500	30
	USB3.2CC1	1000	

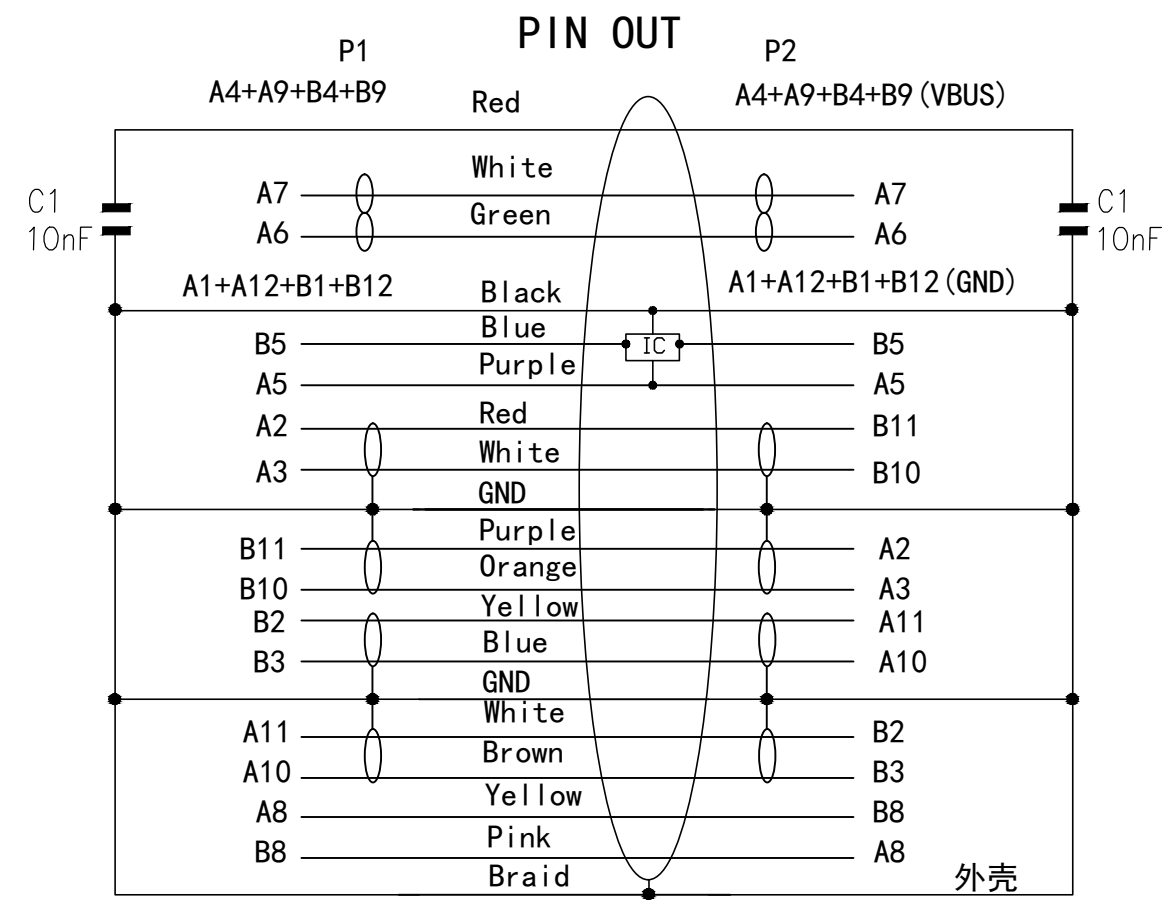

A. Electronic Tests:

- A. Open/Short/Intermittence: 100%
 - B. Hi-Pot: AC 100V 0.01S 1mA
 - C. Insulation Resistance: DC 100V 0.01S 5MΩ Min
 - D. Conductive Resistance: 2Ω Max
- B. USB READ WRITE TEST: (GEN2 1M): (READ) 300MB/S (min), (WRITE) 500MB/S(min);

⑥	DUST COVER	USB3.1 Male Dust Cap	2	PCS
⑤	Coppr Foil	Double Conducting Copper Foil 5u*5m	40	MM
④	MOLDED	45P Black PVC	5	G
③	CONNECTOR	USB3.1 C TYPE Male, Pin Gold Plated, Shell Nickel Plated, E-MARK(5A)+EMI Shield	1	PCS
②	CONNECTOR	USB3.1 C TYPE Male, Pin Gold Plated, Shell Nickel Plated +EMI Shield	1	PCS
①	CABLE	USB3.1 CABLE[1P*32#(7/0.08TC)+D+AL+MY] *4C+1P*32#(7/0.08TC)+4C*32#(7/0.08TC)+2C*22#(41/0.10TC)+F+AL+B(16*9/0.08TC) Black PVC Jacket OD:4.5±0.15MM Marking: E***** 兄 AWM STYLE 2725 80°C 30V VW-1 SUPER HIGH SPEED USB Revision	L	MM
NO	NAME		Q'TY	UNIT

PROJ: TOLERANCE: XX= XXX= PRODUCT NAME: USB-C cable

SCALE: NONE REV: A PART NO: 201930071, 72

UNIT: MM SHEET: 1/3 CUST: EET Group

SUST APPROVED:

APPROVED: Emil Olsen

CHECKED:

DRAWING: 2021.02.20