

NOTES:

ELECRICAL:


- (1). 100% CONTINUITY (OPEN, SHORT, MISSWIRE) ;
- (2). INSULATION RESISTANCE:300V, 5MΩ MIN;
- (3). CONDUCTIVE RESISTANCE: :5Ω MAX;
- (4). 100% COMPUTER TEST:4K*2K@60HZ;
- (5). WIRE SURFACE PRINTING (White):/

PIN OUT

CN1 (TYPE C)	CN2 (HDMI PCBA)	
B1, B12, A1, A12	G	DP PCBA
B4, B9, A4, A9	10uF	
A2	A2	
A3	A3	
B2	B2	
B3	B3	
A10	A10	
A11	A11	
B10	B10	
B11	B11	
A5	A5	
B5	B5	
A6	A6	
A7	A7	
A8	A8	
B8	B8	
SHELL	DRAIN	SHELL

⑧	PE BAG	PE BAG:W155*L175*T0.05mm	1	PCS
⑦	MINI TIE	TIE, METAL MATERIAL INSIDE, BLACK OUTSIDE	1	PCS
⑥	O-ring	O-ring GREEN COLOR	2	PCS
⑤	OUTER MOLD	87A TPU, COLOR FOR BLACK	2	PCS
④	INNER MOLD	LDPE, COLOR FOR WHITIE	2	PCS
③	CONNECTOR 2	DP 20P/MALE, HOUSING FOR BLACK PLASTIC, TERMINAL FOR Cu AND GOLD PLATED, THE SHELL FOR METAL AND GOLD PLATING+PCBA (IC IO363)	1	PCS
②	CONNECTOR 1	USB TYPE C MALE, HOUSING FOR BLACK PLASTIC, TERMINAL FOR Cu AND GOLD PLATED, THE SHELL FOR METAL AND GOLD PLATING+10uF	1	PCS
①	TYPE C CABLE	(1/0.20BC*1P+AL)*4C+1/0.20BC*1P+1/0.20BC*4C+41/0.08BC*2C+AL, BLACK TPU JACKET, OD:4.8±0.2mm	1	PCS

Pack Draw:

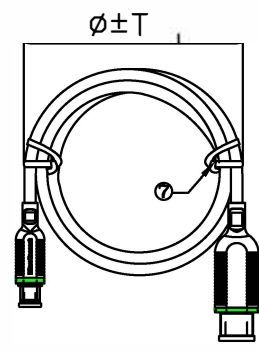

- MPN: MC-USBCDP05 0,5m
- MPN: MC-USBCDP1 1m
- MPN: MC-USBCDP2 2m
- MPN: MC-USBCDP3 3m
- MPN: MC-USBCDP5 5m

NO.		Part name		Specifications describe			Dosage	UNIT
Approved	Reviewer	Drawing	Drawing No.	TYO***			Product name	
Emil Olsen	Franck	Tsou	ITEM No.	MC-USBCDPxx			TYPE C TO DP 20P/M CABLE L=**M(GOLD)	
			Customer Name					
			Unit	mm	Tolerance	X. ±1.00		
			Graphic		X.X ±0.50			

