




7	6	5	4	3	2	1		
ECN NO.			REV	DESCRIPTION		DATE	REVISER	APPROVED

CONSUMER ITEM	LENGTH(mm)
USB3.1CCHAR05W	500±20
USB3.1CCHAR1W	1000±30
USB3.1CCHAR15W	1500±30
USB3.1CCHAR2W	2000±30
USB3.1CCHAR3W	3000±30
USB3.1CCHAR05B	500±20
USB3.1CCHAR1B	1000±30
USB3.1CCHAR15B	1500±30
USB3.1CCHAR2B	2000±30
USB3.1CCHAR3B	3000±30

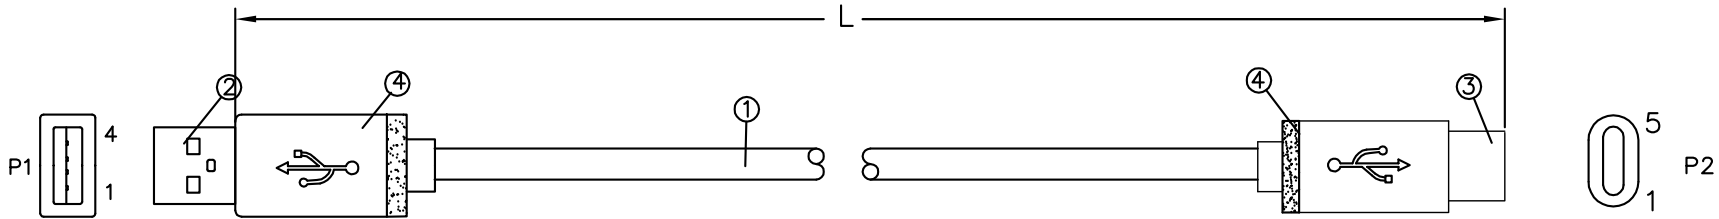

PIN ASSIGNMENT:

P1	P2	R=56K+5%
1	A4 B4 A9 B9	
2	A7	
3	A6	
4	A1 B1 A12 B12	

ELECTRICAL CHARACTER:
1.100% OPEN & SHORT TESTING.

GENERAL TOLERANCES (UNLESS SPECIFIED)				CUST PART NO.:					
4	PVC: WHITE OR BLACK	g	8	ANGULAR: ±3°	DESIGN: ERIC	SCALE: NONE	UNIT: mm	THIRD ANGLE PROJECTION	
3	CONN: USB2.0 TYPE C, CONTACT: GOLD PLATED, SHELL: NICKEL PLATED, WHITE INSULATOR	PCS	1		CHECKED: ERIC	TITLE: USB 2.0 AM TO TYPE C CABLE			
2	CONN: USB2.0 AM, CONTACT: GOLD PLATED, SHELL: NICKEL PLATED, WHITE INSULATOR.	PCS	1		APPROVED: Emil Olsen	PART NO.:		REV: A	
1	CABLE: USB 2.0 28AWG/3C+20AWG/2C OD: 4.0mm PVC JACKET, WHITE OR BLACK	mm	SEE TABLE 1	SIZE A4	DATE: 2021.11.24	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO LUSHENG COMPANY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
ITEM	DESCRIPTION	UNIT	QT'Y						