



USB to Serial RS-232 Adapter (GUC232A)
USB 1.1 to Serial Converter Cable



Model # GUC232A

Description


The USB to Serial RS-232 Adapter provides one RS-232 Serial (DB-9 male) connector via one standard USB port at a data transfer rate of over 230Kbps. You can instantly enjoy connectivity with modem, PDA, POS, or other serial devices on your PC or Mac without the hassle of opening your computer case. It provides a quick, simple, and cost-effective solution and is ideal for various communication and automation applications. This makes the USB interface transparent to serial peripherals, allowing them to easily interface with USB computers and eliminates the setup hassle found with traditional serial port connections. This device also supports energy saving suspend and resume operations.

Features

- USB 1.1 and 2.0 compatible
- Work with serial GPS devices, converts the serial interface on your GPS unit to USB.
- Plug-n-Play for Windows XP
- 16" cable length
- LED status light for data transfer monitoring
- Supports the RS 232 Serial interface
- Supports automatic handshake mode
- Over 230 Kbps data transfer rate
- Supports Remote wakeup and power management
- Provides a 96 byte buffer for each upstream and downstream data transfer
- Easy Installation
- No IRQ required



Function Diagram

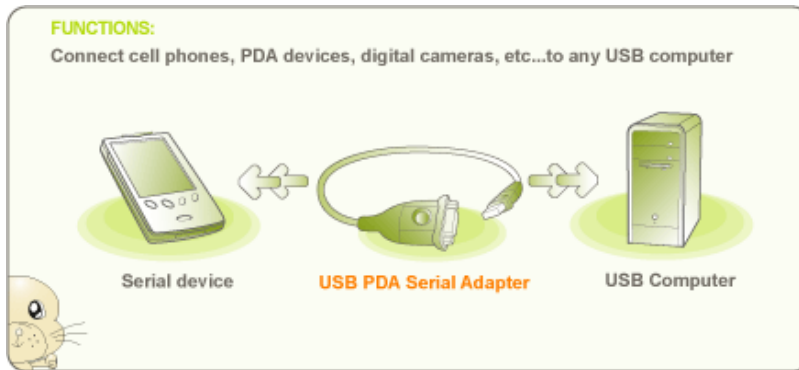

Requirements

For PC Users

- 300 Mhz CPU
- Windows® 98SE, 2000, ME, XP, Vista*
- Available USB port

*XP driver supports Vista

For MAC Users

- Mac G3
- Mac OS 8.6 to 9.2
- Mac OS 10.2 and up
- Available USB port

Package Content

- GUC232A USB to Serial adapter cable
- Installation CD
- User Manual
- Warranty/Registration Card

Warranty 3-YEAR

Specifications

Function	GUC232A
Housing	
Case	Plastic
Power Consumption	90mA
LEDs	
On Line	1
Operating Temperature	20 to 50 degrees (Celsius)
Storage Temperature	0 to 70 degrees (Celsius)
Operating System Support	Windows 98SE, 2000, ME, XP; MAC OS 8.6 to 9.2 - 10.2 and up
USB Specification	USB 1.1 compliant
Transfer Rate	115 Kbps
Humidity	20-80% RH, (Non Condensing)

Cable Length	14 in. (40.64 cm.)
Power Connections	Bus powered
International - Languages	English
Dimensions	GUC232A
Unit Dimensions	
Width	1.36 in. (3.45 cm.)
Height	0.64 in. (1.63 cm.)
Length	2.63 in. (6.68 cm.)
Unit Package Dimensions	
Width	6.25 in.
Height	8.5 in.
Depth	2.5 in.
Master Carton	
Width	12.756 in.
Height	18.189 in.
Depth	16.457 in.
Master Carton Qty.	24
Weight	
Master Carton Wt.	12.10 lbs.
Unit Pack Wt.	0.32 lb.
Unit Wt.	0.22 lbs. (0.1 kg.)

© 2008 IOGEAR, Inc. All other trademarks belong to the respective owners.

