




Querschnitt  
Cross section

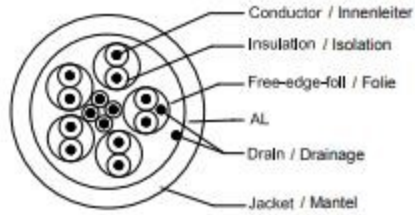

Belegung  
Wiring

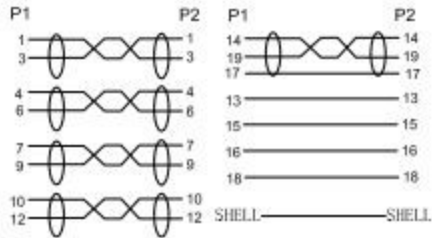

Zeichnung  
Drawing

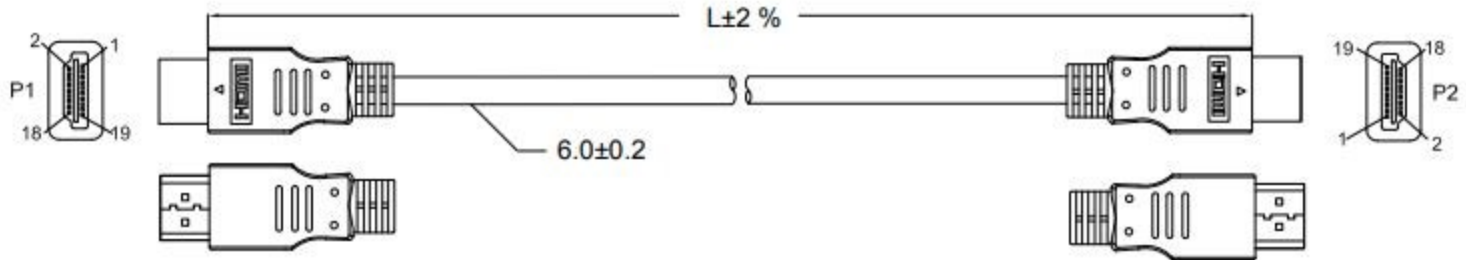

Nr. / No.	Länge / Length (m)	Verpackung / Packing	Farbe / Color
21882	1,00		
21883	1,50		
21884	2,00		
21885	2,50		
21886	3,00		
21887	1,00		
21888	1,50		
21889	2,00		
21890	2,50		
21891	3,00		
21892	4,00		
21893	1,50		
21894	2,00		
21895	3,00		
21896	4,00		
21897	1,50		
21898	2,00		
21899	3,00		

HDMI-Kabel

- Anschlüsse: HDMI-Stecker > HDMI-Stecker
- Kontakte: 19 PIN; vergoldet
- Standards: HDTV bis 2160p (4K) @ 30 Hz, 3D bis 1080p (Full HD) High Speed HDMI-Kabel mit Ethernet
- Kabel: UL AWM STYLE 20276 80°C 30V VW-1 30 AWG CCS
- Isolationswiderstand: DC 300 V 5-10 MOhm
- Kontaktwiderstand: 5-7 Ohm
- Konformität: RoHS

HDMI cable

- Connectors: HDMI plug > HDMI plug
- Contacts: 19 PIN; gold-plated
- Standards: HDTV up to 2160p (4K) @ 30 Hz, 3D up to 1080p (Full HD) High Speed HDMI cable with Ethernet
- Cable: UL AWM STYLE 20276 80°C 30V VW-1 30 AWG CCS
- Insulation resistance: DC 300 V 5-10 MOhm
- Contact resistance: 5-7 Ohm
- Conformity: RoHS

Änderungen

Datum	Name	gez.:	Datum	Name	Bezeichnung
25.02.2019	tf	gez.:	25.07.2014	tf	HDM19190.5V1.4W
		gepr.:	25.07.2014	tf	
		Norm:			
Änderungen vorbehalten / Subject to change					



Blatt

von