


MultiSync® X554HB

NEC LCD 55" High Brightness Large Format Display

Datasheet

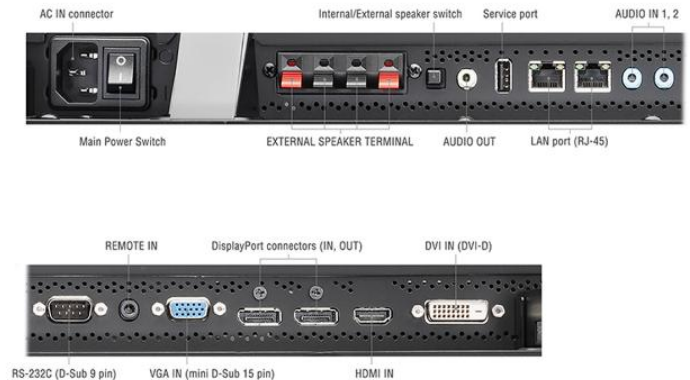

With NEC's new MultiSync® X554HB connecting with customers has never been smarter or brighter. The display offering a maximum brightness of 2700cd/m² will capture viewers with a stunning visual experience, while minimizing power consumption use through a programmable ambient light sensor.

High reliability and a stable image quality are guaranteed by the selection of professional grade components and an intelligent thermal management which allows for an even heat distribution even under challenging conditions and 24/7 applications.

This display is ideal for any heavy duty digital signage application that requires extremely high brightness levels and sunlight proof operation.

Benefits

Superb readability in any lighting condition crisp playback of contents thanks to high brightness of 2700 cd/m² and reliable 8-bit S-PVA colour reproduction combined with an optical (Quarter Lambda) Filter to guarantee an impressive viewing experience even through polarized sunglasses.

Sunlight-proof operation with highly temperature-resistant LCD panel coating to withstand direct sunlight without blackening effects.

Mission-critical 24/7 ready operation with reliable, industry grade components and NEC trusted performance.

Future Ready with OPS Cable Free Expansion upgrade the power of your display at any time while seamlessly integrating one of our various Slot-in PCs, signal interfaces and other OPS compatible products without the need for external cables or devices.

Resource Saving Device Management management of all connected NEC devices can be administered from a centralised location, thus reducing demand on your resources, by using the NaViSet Administrator 2 software tool.

Programmable Ambient Light Sensor - automatically adapts brightness to suit ambient light conditions ensuring reduced power consumption and eye pleasing luminosity levels.

Automatically respond to viewer presence to minimise unnecessary power use or for creative signage applications the optional Human Sensor adapts the display brightness or changes inputs when a person enters a proximity zone.

Convenient installation and maintenance with NFC the built-in near field communication allows pre-configuration and servicing of the display by using an NFC capable device loaded with the NEC Android App.

Product Information

Product Name	MultiSync® X554HB
Product Group	NEC LCD 55" High Brightness Large Format Display
Order Code	60003912

Display

Panel Technology	S-PVA with direct LED backlight
Active Screen Area (W x H) [mm]	1,209 x 680
Screen Size [inch/cm]	55 / 140
Brightness [cd/m²]	2700, 1600 Eco (shipment setting)
Contrast Ratio (typ.)	5000:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	6 (grey-to-grey)
Haze Level [%]	1
TNi [°C]	110
Supported Orientation	Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	50 - 85

Resolution

Native Resolution	1920 x 1080 at 60 Hz
Supported on DisplayPort and HDMI	3840 x 2160 (24/30 Hz); 1920 x 1080; 1600 x 1200; 1360 x 768; 1280 x 1024; 1280 x 768; 1080i; 1080p; 1024 x 768; 800 x 600; 720p (50/60 Hz); 640 x 480; 576p (50 Hz); 480p (60 Hz)
Supported on HDMI only	4096 x 2160 (24 Hz); 3840 x 2160 (25 Hz); 1360 x 768; 576i (50 Hz); 480i (60 Hz)

Connectivity

Input Video Analogue	1 x D-sub 15 pin
Input Video Digital	1 x DisplayPort (with HDCP); 1 x DVI-D (with HDCP); 1 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	1 x DisplayPort; 1 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Output Video Digital	1 x DisplayPort out (loop through: DisplayPort, DVI-D, HDMI, Interface Extension Slot, OPS)
Output Audio Analogue	3,5mm jack
Output Control	LAN 100Mbit
Remote Control	LAN with SNMP; Remote Control IR (internal/external (optional) sensor); RS-232C (9-pin D-sub) Input

OPS Option Slot

Slot Technology	Open pluggable specification (NEC / Intel OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4

Interface Extension Slot

Slot Technology	analogue and digital interface extension (NEC standard)
-----------------	---

Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

Electrical

Power Consumption [W]	310 Eco (shipment setting), 500
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80

Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,253 x 724 x 137
Weight [kg]	Without stand: 32.6
Bezel Width [mm]	19.5
VESA Mounting [mm]	4 holes; 400 x 400 (FDMI); M8
Ingress Protection	IP40 (front); IP20 (back)

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; HTTP Server; Image flip; NaViSet Administrator 2; Point Zoom Function; Programmable 10-bit LUT with 3 memory banks; Sticky Note Function in OSD; User readable log function
Safety and Ergonomics	C-tick; CE; FCC Class B; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DVI-D cable; Power Cable; Remote Control
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7

Available Options

Accessories	Feet (ST-5220); Speaker (SP-RM1); Trolley (PDMHM-L); Wall mount (PDW S 32-55 P L)
Interface Extension	SB3-AB1 analogue: Audio; Component; Composite; S-Video SB3-AB2 analogue: Audio; RGBHV SB3-DB1 digital: 2 x HDMI
OPS	HD-SDI 1.5G, 3G; HDBaseT receiver; Intel® Atom, Celeron and Core CPUs; WiDi receiver

Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 450 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: D; Human Sensor
Ecological Materials	Manuals on CD; Optional feet



This document is © 2016 NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 13.06.2016